

BRAVO - LEVER HOIST

The Bravo lever hoist is ideal for industrial and building/civil engineering applications. With a 1/4 t to 6 t capacity, this hoist is designed for pulling, lifting, positioning and adjusting loads in workshops and/or on building sites. Meets or exceeds ANSI B30.21C, Manually Lever-Operated Hoist code.

Strong


- ◆ The hoist and its components are made of high tensile alloy steel
- ◆ Excellent weight / capacity / size ratio

Safe

- ◆ 360° swivel hook with overload opening indicators
- ◆ Removable safety catches marked with WLL of the hoist
- ◆ 5 sprocket load wheel with closed bearings
- ◆ Free wheel safety device activates braking mechanism when load applied in neutral position

Options

- ◆ Load limiter (except on 1 t)
- ◆ Shipyard hooks (for 1 1/2 & 3 t only)
- ◆ Safety hooks

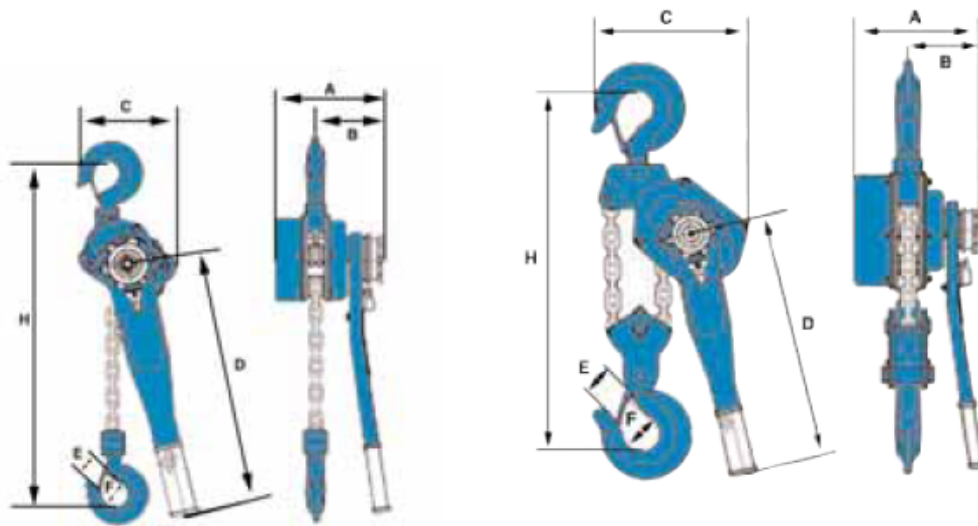

0.25 to 3 t.
(250 to 3,000 daN/kg)

6 t
(6,000 daN/kg)

Technical sheets available

Model	unit	0.25 t	0.5 t	0.75 t	1 t	1.5 t	3 t	6 t	
Capacity	lbs. (kg)	500 (250)	1,000 (500)	1,500 (750)	2,000 (1,000)	3,000 (1,500)	6,000 (3,000)	12,000 (6,000)	
Standard lift	ft. (m)	5 (1.5)	5 (1.5)	5 (1.5)	5 (1.5)	5 (1.5)	5 (1.5)	5 (1.5)	
Number of falls		1	1	1	1	1	1	2	
Effort on lever at capacity	lbs. (kg)	57 (26)	79 (36)	44 (20)	57 (26)	46 (21)	73 (33)	75 (34)	
Load chain size	mm	4 x 12	5 x 15	6 x 18	6 x 18	7 x 21	10 x 30	10 x 30	
Dimensions	A	in. (mm)	3.6 (91)	4.3 (110)	5.5 (139)	5.5 (139)	6.9 (174)	7.9 (200)	7.9 (200)
	B	in. (mm)	2.8 (70)	3.1 (80)	3.3 (84)	3.3 (84)	4. (108)	4.5 (115)	4.5 (115)
	C	in. (mm)	2.8 (71)	4.8 (122)	6 (153)	6 (153)	6.3 (160)	7.3 (185)	9.1 (230)
	D	in. (mm)	6.2 (157)	9 (228)	11.3 (288)	11.3 (288)	16.5 (418)	16.5 (418)	16.5 (418)
	E	in. (mm)	0.8 (21)	0.9 (23)	1 (26)	1 (26)	1.2 (31)	1.5 (39)	1.8 (45)
	F	in. (mm)	1.1 (28)	1.4 (35)	1.5 (37)	1.5 (37)	1.8 (45)	2.2 (55)	2.6 (65)
H min.	in. (mm)	9.2 (233)	12 (305)	11.9 (303)	11.9 (303)	14.6 (370)	19.7 (500)	24.8 (630)	
Weight	lbs. (kg)	4 (2)	11 (5)	15 (7)	15 (7)	24 (110)	44 (20)	66 (30)	